



Chic Cable Sweater

WR2145



Designed by Vladimira Cmorej.

Directions are for size Small; changes for sizes Medium, Large, XLarge and XXLarge are in parentheses.

Finished Bust: 35, (39, 43, 47, 51)".

Finished Length: 20¾ (21¾, 22½, 23½, 24¼) ".

RED HEART® "Shimmer™": 4 (4, 5, 6, 6) balls 1929 Red.

Knitting Needles: 4 mm [US 6].

Circular Knitting Needles: 3.5 mm [US 4], 24" long.

Cable needle, stitch holders (2), stitch markers (2), yarn needle.

GAUGE: 20 sts = 4"; 27 rows = 4" in Stockinette stitch st. 23 sts = 4"; 29 rows = 4" in Cable Pattern (slightly stretched). **CHECK YOUR GAUGE. Use any size needles to obtain the gauge.**

SPECIAL ABBREVIATIONS

2/2 LC = slip next 2 sts to cable needle, hold to front; k2; k2 from cable needle.

2/2 RC = slip next 2 sts to cable needle, hold to back; k2; k2 from cable needle.

Cable Pattern for Panel A (multiple of 6 sts + 1)

Row 1 (right side): P1, * 2/2 RC, p2; repeat from *.

Row 2: * K2, p4; repeat from * to last st, k1.

Row 3: P1, * k4, p2; repeat from *.

Rows 4 - 7: Repeat Rows 2 and 3 two times.

Row 8: Repeat Row 2.

Repeat Rows 1 – 8 five times more, then repeat Rows 1 - 6 once more for Cable Panel A.

Cable Pattern for Panel B (multiple of 6 sts + 1)

Row 1 (right side): * P2, 2/2 LC; repeat from * to last st, p1.

Row 2: K1, * p4, k2; repeat from *.

Row 3: * P2, k4; repeat from * to last st, p1.

Rows 4 - 7: Repeat Rows 2 and 3, two times.

Row 8: Repeat Row 2.

Repeat Rows 1 – 8, five times more, then Rows 1 - 6 once more for Cable Panel B.

Left Sleeve Cable Pattern (multiple of 6 sts + 6)

Row 1 (right side): P1, * k4, p2; repeat from * to last 5 sts, k4, p1.

Row 2: K1, * p4, k2; repeat from * to last 5 sts, p4, k1.

Rows 3 - 6: Repeat Rows 1 and 2, two times.

Row 7: P1, * 2/2 RC, p2; repeat from * to last 5 sts, 2/2 RC, p1.

Row 8: Repeat Row 2.

Rows 9 - 14: Repeat Rows 1 and 2 three times.

Repeat Rows 7 – 14 for Left Sleeve Cable Pattern.

Right Sleeve Cable Pattern (multiple of 6 sts + 6)

Row 1 (right side): P1, * k4, p2; repeat from * to last 5 sts, k4, p1.

Row 2: K1, * p4, k2; repeat from * to last 5 sts, p4, k1.

Rows 3 - 6: Repeat Rows 1 and 2 two times.

Row 7: P1, * 2/2 LC, p2; repeat from * to last 5 sts, 2/2 LC, p1.

Row 8: Repeat Row 2.

Rows 9 - 14: Repeat Rows 1 and 2 three times.

Repeat Rows 7 – 14 for Right Sleeve Cable Pattern.





SWEATER

Back

With knitting needles, cast on 95 (107, 117, 131, 139) sts.
Set up Ribbing Pattern

Row 1 (wrong side): P1 selvedge st, k1, [p4, k2] 5 (5, 6, 6, 7) times, place first marker, p1, [k1, p1] 15 (21, 20, 27, 25) times, place second marker, [k2, p4] 5 (5, 6, 6, 7) times, k1, p1 selvedge st.

Keeping first and last st in St st for selvedge, and continuity of sts in rib pattern as established, work 6 more rows.

Dec and Set up Cable Panel Patterns

Next Row (right side): K1, work Row 1 of Cable Panel A across to first marker, slip marker, k1 (k3, k3, k1, k3), k2tog, * k2, k2tog; repeat from * to 0 (2, 0, 0, 2) sts before second marker, k0 (k2, k0, k0, k2), slip marker, work Row 1 of Cable Panel B to end row—87 (97, 107, 117, 127) sts.

Keeping sts between markers in St st, continue in pattern as established until all rows of Cable Patterns have been worked, and Panels are completed.

Continue in St st until piece measures 13 (13½, 13¾, 14, 14¼)" from beginning, ending with a wrong side row

Shape Armholes

Bind off 4 (5, 6, 7, 8) sts at beginning of next 2 rows. Continue to bind off at armhole edge 3 sts once, then 2 sts 2 (2, 2, 4, 6) times—69 (77, 85, 89, 93) sts. Dec 1 st at beginning and end of next row, then every other row 2 (2, 3, 4, 5) times—63 (71, 77, 79, 81) sts.

Work even until armhole measures 6¾ (7¼, 7¾, 8½, 9)" ending with a wrong side row.

Shape Shoulders and Back Neck

Bind off 5 (6, 7, 7, 7) sts at beginning of next row, work until there are 14 (16, 18, 18, 19) sts on right hand needle, place center 25 (27, 27, 29, 29) sts on stitch holder for back neck; join a second ball of yarn and work to end. Working both sides at once with separate balls of yarn, bind off 5 (6, 7, 7, 7) sts at beginning of next 3 rows, then bind off 5 (6, 7, 7, 8) sts at beginning of next 2 rows AND AT SAME TIME, bind off 2 sts at each neck edge twice.

Front

Work same as for Back, until armhole measures 4 (4¼, 4½, 5, 5½)" ending with a wrong side row.

Shape Neck

Next Row: K25 (28, 31, 31, 32) sts, place center 13 (15, 15, 17, 17) sts on holder, join a second ball of yarn and k to end. Working both sides at once with separate balls of yarn, bind off 3 sts at each neck edge once, then bind off 2 sts each neck edge twice—18 (21, 24, 24, 25) sts each side. Dec 1 st each neck edge every other row 3 times—15 (18, 21, 21, 22) sts each side.

Work even until armhole measures same as Back to shoulder edge, ending with a wrong side row.

Shape Shoulders

Same as for Back.

Left Sleeve

With knitting needles, cast on 74 (82, 90, 90, 98) sts.

Row 1 (wrong side): * P1, k1; repeat from * across. Repeat Row 1 for P1, k1 rib until piece measures 1", ending with a wrong side row.

Next Row: Begin St st and dec across as follows: * k2, k2tog; repeat from * to last 2 sts, k2—56 (62, 68, 68, 74) sts.

Work even in St st until sleeve measures 11¾ (11½, 11¾, 11½, 11¾)" from beginning, ending with a wrong side row.

Set up Cable Pattern and Shape Sleeve

K1, work Row 1 of Cable Pattern for Left Sleeve across row to last st, k1. Working extra sts into cable pattern as they become available, inc 1 st at beginning and end of every fourth row 3 (2, 1, 8, 7) times, then every sixth row 3 (4, 5, 1, 2) times—68 (74, 80, 86, 92) sts.

Work even until piece measures 16¾ (16¾, 17¼, 17¼, 18)" from beginning, ending with a wrong side row.

Shape Sleeve Cap

Bind off 4 (5, 6, 7, 8) sts at beginning of next 2 rows, then bind off 3 sts at beginning of next 2 rows, then bind off 2 sts at beginning of next 2 (2, 2, 4, 6) rows—50 (54, 58, 58, 58) sts. Dec 1 st at beginning and end of next row, then every other row 3 (4, 5, 3, 4) times, then every fourth row 2 (2, 3, 4, 3) times, then every other row 4 (4, 3, 4, 6) times—30 (32, 34, 34, 30) sts. Bind off 2 sts at beginning of next 4 rows, then bind off 3 sts at beginning of next 2 rows, then bind off 4 sts at beginning of next 2 rows. Bind off remaining 8 (10, 12, 12, 8) sts.

Right Sleeve

Work same as for Left Sleeve, working Right Sleeve Cable Pattern.





FINISHING

Sew left shoulder seam.

Neckband

With right side facing and circular needles, pick up and k 108 (114, 118, 124, 124) sts evenly around neckline including sts from back and front neck holders. Work in P1, k1 rib same as for sleeves for 6 rows. Bind off loosely.


Sew right shoulder seam including sides of neckband. Set in sleeves. Sew sleeve and side seams. Weave in yarn ends.




RED HEART® "Shimmer™", Art E763 available in solid color 280 yd (256 m) 3.5 oz (100 g) balls.

ABBREVIATIONS: dec = decrease; inc = increase; k = knit; k2tog = knit 2 stitches together; mm = millimeters; p = purl; p2tog = purl 2 stitches together; St st = Stockinette stitch; st(s) = stitch(es); tog = together; [] = work directions in brackets the number of times specified; * or ** = repeat whatever follows the * or ** as indicated.


CABLE PATTERN - PANEL A

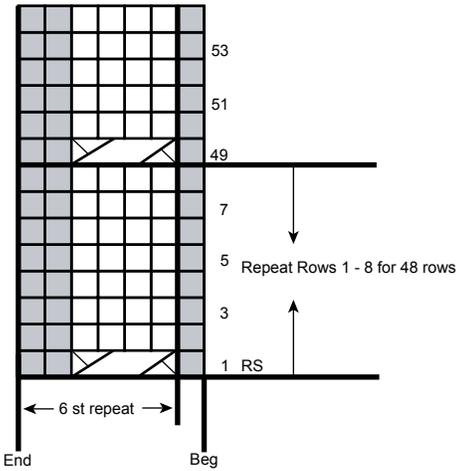


CABLE PATTERN - PANEL B

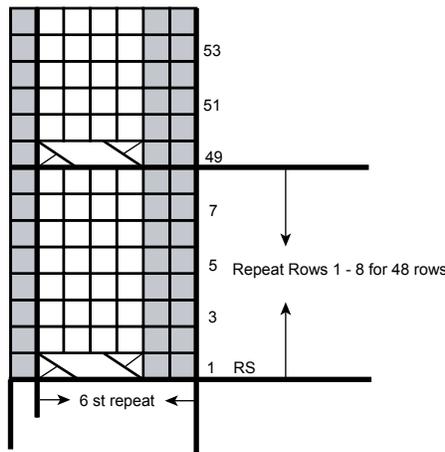

LEFT SLEEVE CABLE PATTERN

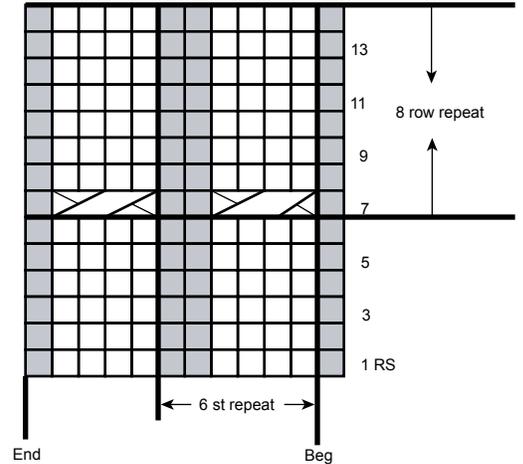

RIGHT SLEEVE CABLE PATTERN

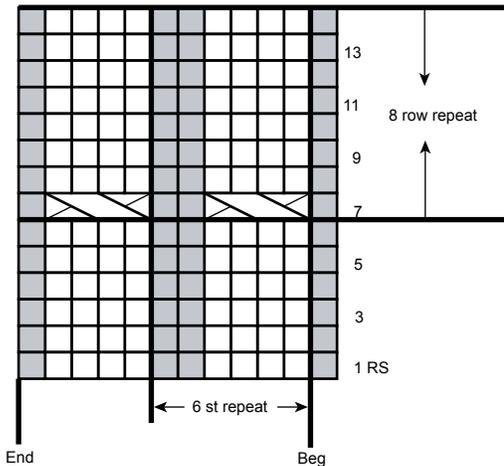

STITCH KEY

- White square: K on right side, p on wrong side
Grey square: P on right side, k on wrong side
Diagonal lines: 2/2 RC = Slip next 2 sts to cn, hold to back, k2, k2 from cn
Diagonal lines: 2/2 LC = Slip next 2 sts to cn, hold to front, k2, k2 from cn

